

# 1/8-INCH FIREROD® CARTRIDGE HEATERS

## Miniature FIREROD® Provides Maximum Performance Where Space Is Limited

When an application requires heat delivered into a small space with minimum weight, the 1/8-inch diameter FIREROD® cartridge heater from Watlow® is the ideal solution.

This swaged constructed miniature cartridge heater features high watt density, high operating temperature capability and provides long life in applications where it is essential to have a very small size.


Like all Watlow FIRERODs, the 1/8-inch maximizes heat transfer utilizing resistance wiring close to the heater sheath, isolated by a thin layer of compacted MgO insulation.

For this and other Watlow heaters, customers can also specify lead length and choose from a variety of lead options. Leads can be insulated with fiberglass or PTFE or protected by stainless steel braid or hose.

Watlow's 1/8-inch FIRERODs also have an option many others lack: the ability to have an internal J or K-type thermocouple located near the tip of the heater.

### Typical Applications

- Burn-in chip test system
- Mass spectrometry
- High-definition ink jet printers
- 3D printing, fused deposition modeling
- Gas chromatography
- Respiratory equipment
- Gas analyzers
- Freeze protection
- Packaging equipment

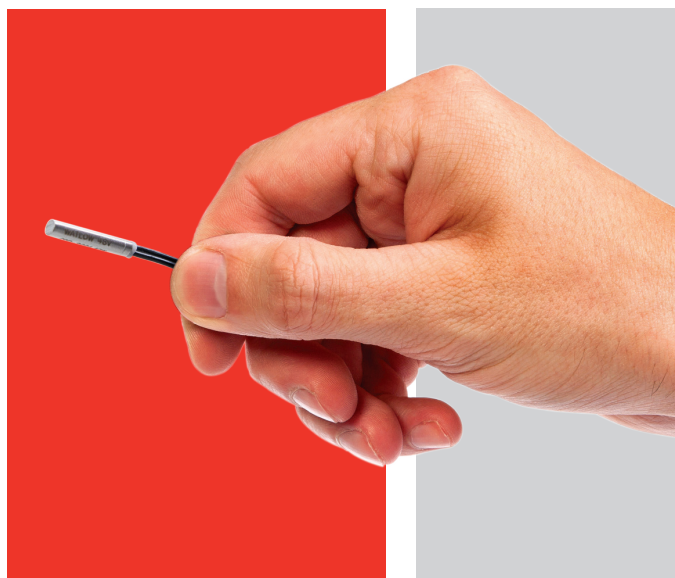

### Features and Benefits

#### Miniature size

- Delivers high performance in a small package
- Supports a wide variety of application requirements

#### Low mass

- Provides quicker response time
- Increases heater life
- Lowers internal temperature

#### Swaged construction

- Provides higher watt density and higher temperature capabilities
- Allows maximum heat transfer
- Increases safety due to low leakage current

#### Optional internal thermocouple

- Reduces system footprint
- Measures temperature at point of application

#### Manufactured to the highest quality standards

- Outlasts competitors in life testing
- Backed by over 50 years of industry expertise

#### Numerous lead options available

- Designed for flexibility and performance

## Specifications

### Sheath

- Alloy 600 is standard
- 304 stainless steel is available

### Maximum application temperature

- 1400°F (760°C)

### Maximum voltage

- 240V

### Maximum wattage at 240V

- 744 W

### Maximum amperage

- 3.1 amp

### Wattage tolerances

- +10 percent, -15 percent


### Dimensions

- Actual diameter is 0.122 in. (3.10 mm) ± 0.002 in. (0.05 mm)
- Minimum overall length is 0.875 in. (22.22 mm)  
(Minimum length may change based on lead construction, volts and watts, please consult factory.)
- Maximum overall length is 12 in. (304.8 mm)
- Length tolerance 3.5 in. (89 mm) and less ± 3/32 in. (2.4 mm)
- Length tolerance greater than 3.5 in. (89 mm) ± 3 percent


### Construction

- Solid lead wire is standard, but stranded is available
- Lead options (see illustrations):
  - Crimped-on
  - Swaged-in
- Lead types are:
  - Fiberglass 482°F (250°C)
  - High temperature fiberglass 842°F (450°C)
  - PTFE 392°F (200°C)
- Moisture resistant option: Welded end-disc is standard with PTFE seal and leads available
- Internal thermocouple available
  - Thermocouple embedded in the end-disc "C" location
  - Thermocouple junction is grounded
  - Type J or K available (solid lead wire)
  - Swaged-in, fiberglass 482°F (250°C)
  - Swaged-in PTFE 392°F (200°C)
  - For available lengths, consult factory
- Lead protection options
  - Stainless steel braid crimped over lead end
  - Stainless steel flexible hose crimped over lead end
- Other options
  - Bent heaters, in no-heat section, up to 90° angle
  - One inch diameter mounting flange (FS flange)


## Average Hours of Operation During Stress Test Failure

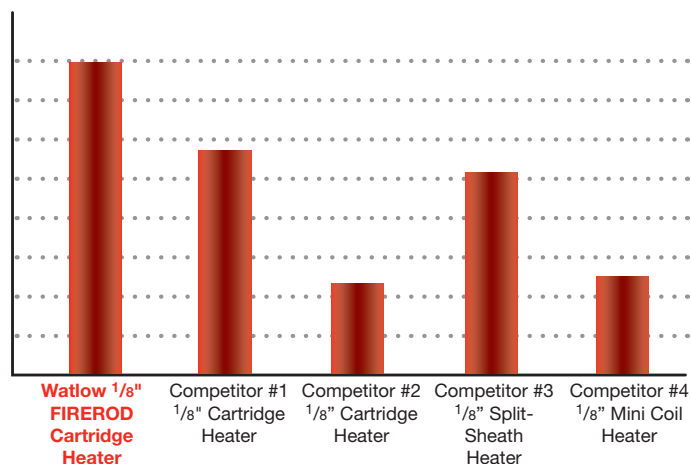

## Lead Options

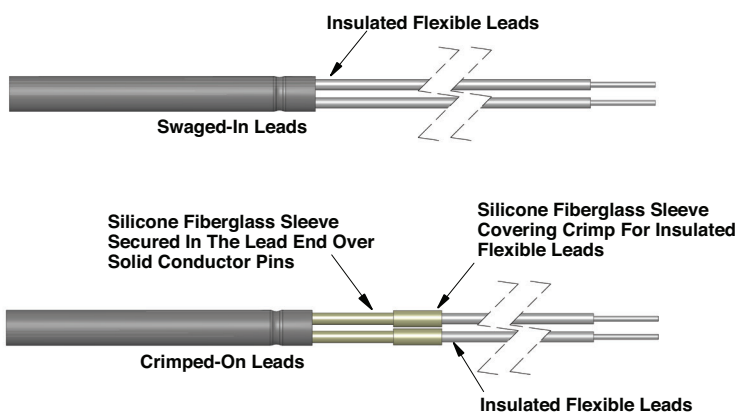

## Internal Construction

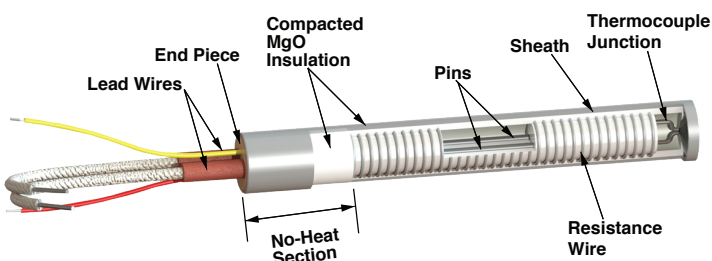

Watlow® and FIREROD® are registered trademarks of Watlow Electric Manufacturing Company.

To be automatically connected to the nearest North American Technical Sales Office:  
**1-800-WATLOW2 • www.watlow.com • inquiry@watlow.com**

International Technical Sales Offices: Australia, +61 3 9335 6449 • China, +86 21 3532 8532 • France, +33 (0) 1 41 32 79 70  
Germany, +49 (0) 7253 / 9400-0 • India, +91 40 6661 2700 • Italy, +39 02 4588841 • Japan, +81 3 3518 6630 • Korea, +82 2 2169 2600  
Malaysia, +60 3 8076 8745 • Mexico, +52 442 256 2200 • Singapore, +65 6773 9488 • Spain, +34 91 675 1292  
Taiwan, +886 7 288 5168 • United Kingdom, +44 (0) 115 964 0777