


- IP67 rated.
- High strength bonding.
- Suitable for use in Safe and Hazardous areas.
- Certified to be used with all Heat Trace self-regulating cables.

DESCRIPTION

A range of heat shrink tubing including heat shrink end seals (HES2) and heat shrink power seals (HPS2). A flame retardant, flexible material designed to provide a protective seal for the end of the cable whilst enabling it to be connected to the power supply.

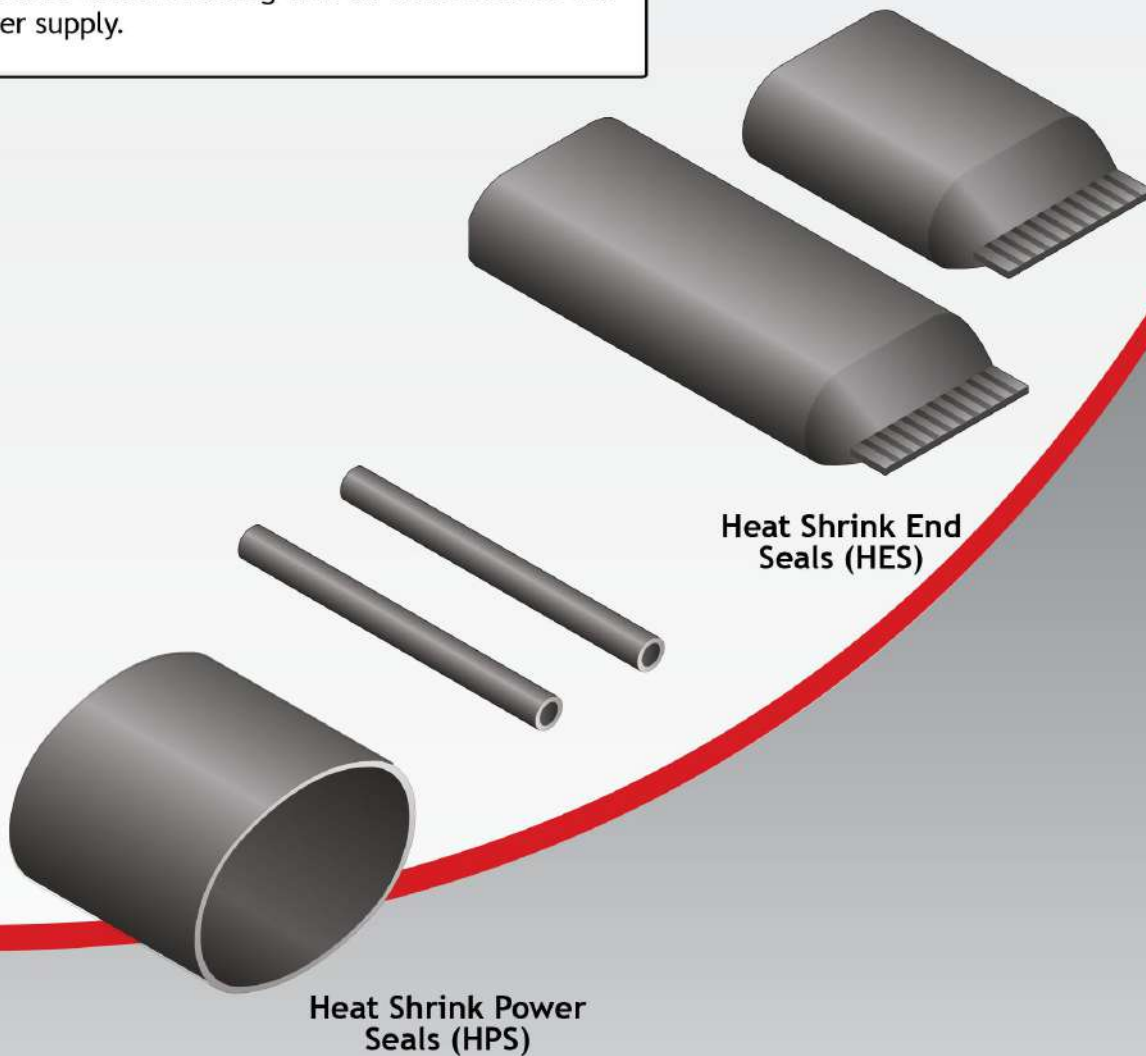

SPECIFICATION

	HES	HPS
OPERATING TEMPERATURE RANGE:	-40°C to 105°C -40°F to 221°F	-40°C to 90°C -40°F to 194°F
MIN SHRINK TEMPERATURE:	80°C (176°F)	90°C (194°F)
SHRINK RATIO:	4:1	2:1
INGRESS PROTECTION:	IP67	

SUITABLE FOR USE WITH:

HES	FSM-Cx; FSR-Cx; FSE-Cx; FSEw-Cx; FLVw-Cx; FSS-Cx; FSU-Nx; FSUw-Nx AHT; MTFJ-Cx; PHT-Nx
HPS	FSM-Cx; FSR-Cx; FSE-Cx; FSEw-Cx; FLVw-Cx; FSS-Cx; FSU-Nx; FSUw-Nx AHT; MTFJ-Cx; PHT-Nx

APPROVAL DETAILS:

ATEX	-	CML 19ATEX3390U
IECEX	-	CML 19.0133U
CSA Safe	-	1295278, 1352981
CSA Haz	-	1350782, 1547590
FM	-	3009080
EAC	-	TC RU C-GB.MH062.B.06041

ATEX MARKINGS:

	II 2 GD Ex 60079-30-1 IIC Gb Ex 60079-30-1 IIIC Db
---	--

COMPONENTS:

HES	20mm Heat Shrink End Seal 50mm Heat Shrink End Seal Ring Crimp (for braided cables)
HPS	Heat Shrink Power Seal Earth Sleeve Ring Crimp (for braided cables) Caution Label

ORDERING INFORMATION:

Example: HES 2

End Seal _____
Size of Seal* _____

Example: HPS 2

Power Seal _____
Size of Seal* _____

HES & HPS are sold as individual kits, packs of five or can also be found as part of our Standard Termination Kits including:

HTK1, HTK3 and HTK5

**For more information and the full list of kits please see our website and the termination matrix.*

Please refer to our termination matrix for correct use of these kits.

INSTALLATION EXAMPLE:

